
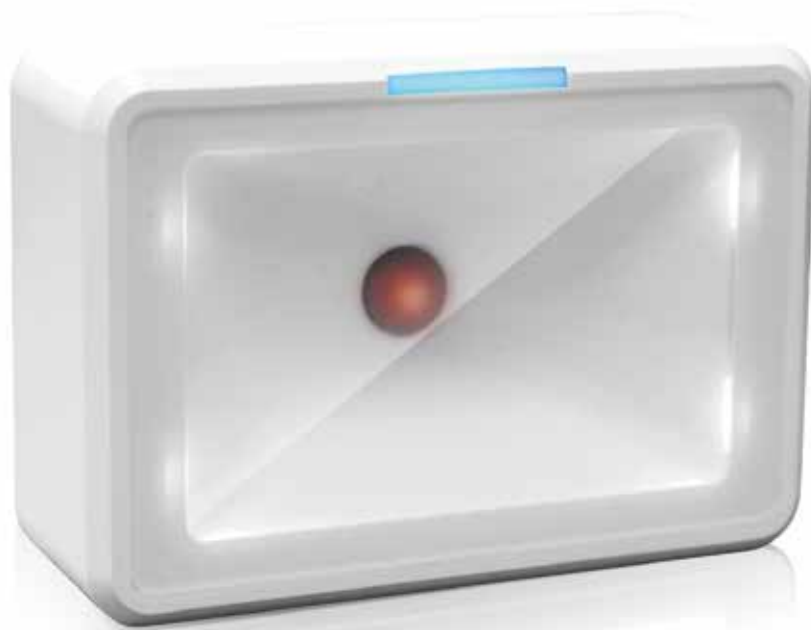


专业手机读码器  
Professional Mobile Phone Reader

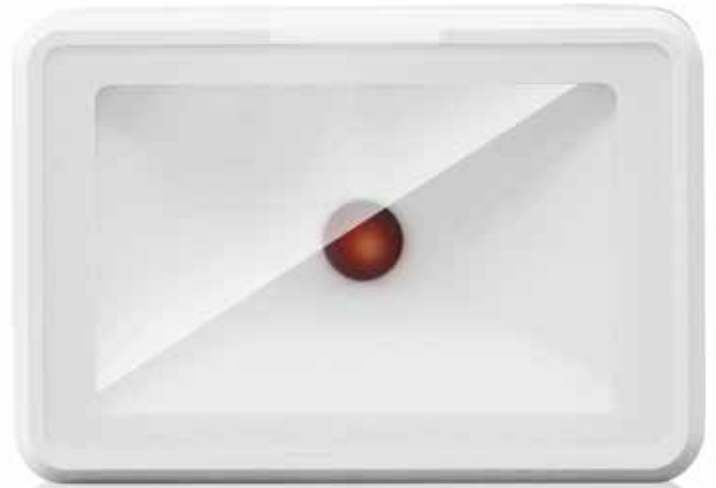

大视野  
Large Field of View

- 物体自感应
- 内置RS232和USB接口
- 超大扫描窗口+超薄时尚设计
- 多国语言条码信息直传
- 大视角影像感光器
- 支持无背光屏幕条码读取
- Object auto sense
- Build in RS232 and USB interface
- Omni directional reading for all 1D/2D barcodes
- Super large field of view
- Can read barcode on screen even without backlight from cellphone
- Multiple language barcode message transfer

### Physical Characteristics

尺寸Dimensions:	128mm x 88mm x 45mm
重量Weight:	230g
电压Voltage:	5 VDC
电流Current:	200mA

### Performance Characteristics

传感器像素Image (Pixels):	640 pixels (H)x 480 pixels (V)
光源Light Source:	Illumination:6500K LED
视场角Field of View:	72° (H) x 64° (V)
旋转倾斜偏转Roll / Pitch / Yaw:	360°, ±65°, ±60°
打印对比度Print Contrast:	20% minimum reflective difference
接口支持Interfaces Supported:	USB, RS232
运动容差Motion Tolerance s:	>2m/s

### Symbology Decode Capability

一维条码/1-D:	UPC, EAN, Code 128, Code 39, Code 93, Code 11, Matrix 2 of 5, Codabar Interleaved 2 of 5, Mis Plessey, GSI DataBar, China Postal, Korean Postal , etc
二维条码/2-D:	PDF417, MicroPDF417, Data Matrix, Maxicode, QR Code, MicroQR, Aztec Hanxin, etc.
条码精度Minimum Resolution:	≥3.9 mil

### User Environment

工作温度Operating Temperature:	-30°C to 70°C
存储温度Storage Temperature:	-40°C to 150°C
湿度Humidity:	0% to 95% relative humidity,non-condensing
抗震性Shock Specifications:	Designed to withstand 1.5m(5' ) drops
环境光免疫Ambient Light Immunity:	0-100,000 Lux.

### Decode Ranges

6.88 mil (PDF417)	0mm-50mm
10 mil (Data Matrix)	0mm-50mm
13 mil (UPCA)	5mm-110mm
20 mil (QR)	0mm-100mm

Performance may be impacted by bar code quality and environmental conditions

